


Comparison of CBR vs Depth of Penetration on Fairbanks Silt



Testing conducted by University of Alaska Fairbanks (UAF)
SF2 Application Rate = 5% Synthetic Fluid with 0.5% Fibers

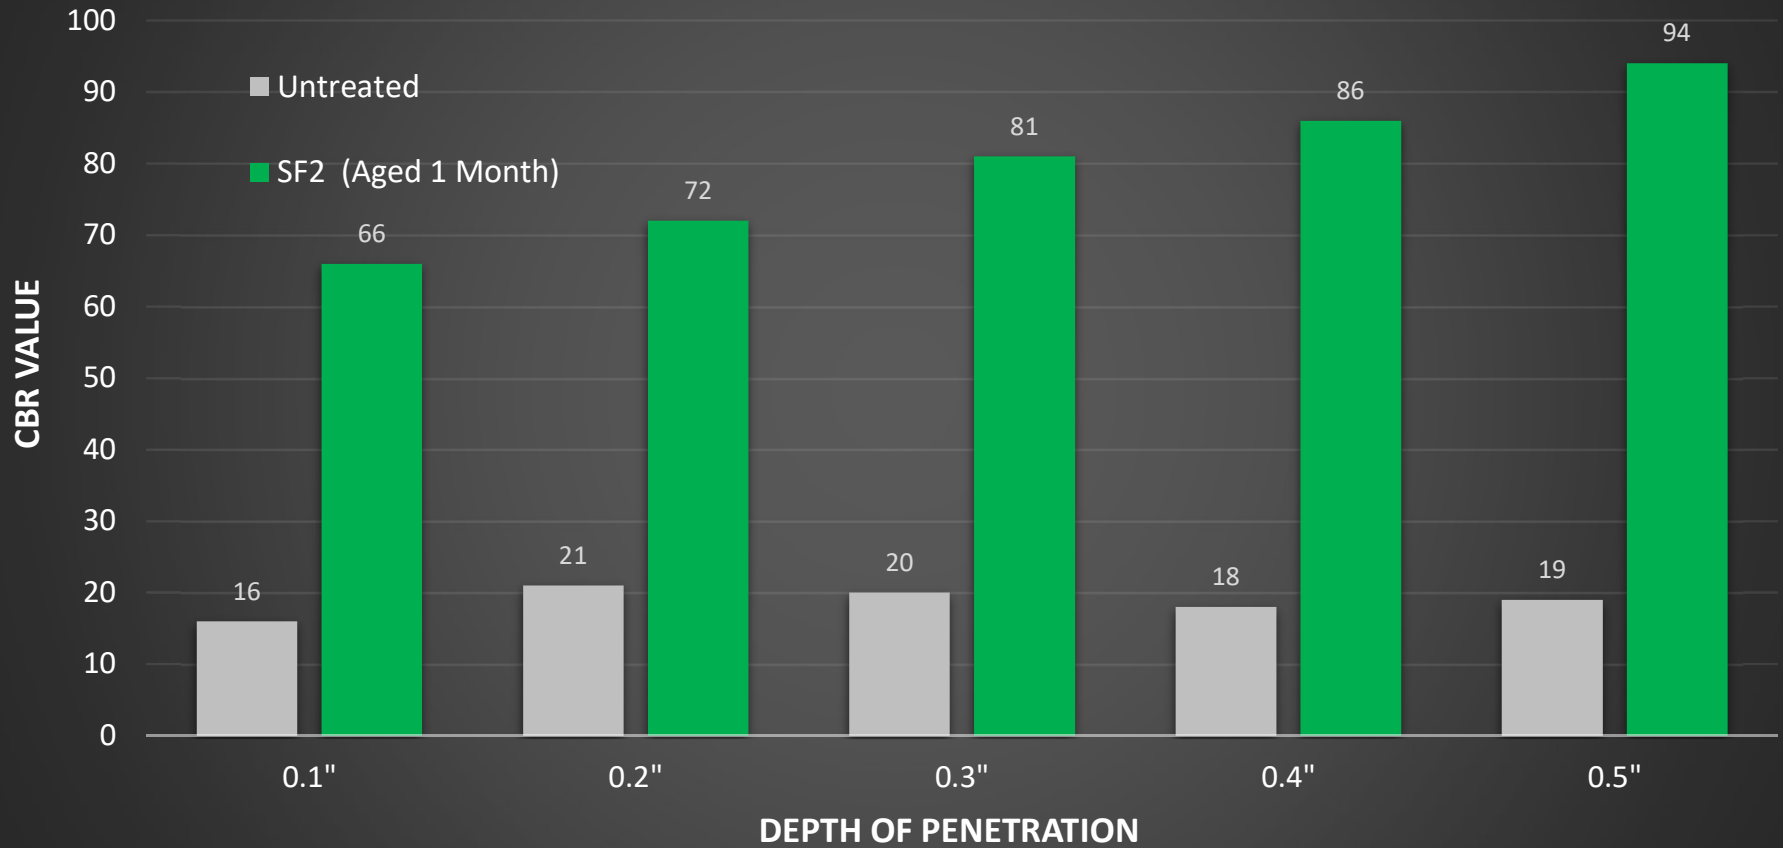